

Acid based rust remover & metal brightener

FEATURES & BENEFITS


- Not harmful to the marine environment.
- Cleaning after ores, cement, lime- stone/sand, removal of rust, brightening of metals in cargo holds.
- Cleans ferrous metal surfaces.
- Removes light rust and rust stains and Inhibits corrosion
- Surface brightening
- Prevents flash rust and inhibits corrosion
- Removes rust stains from painted, ceramic and wooden surfaces.
- Easy to use
- Approved according to IMO MEPC.1/Circ. 590

DESCRIPTION

In cargo hold where ores, cement, lime- stone / sand, gypsum have been carried, NAVACLEAN 873 – RUST & STAIN REMOVER is the ideal solution.

NAVACLEAN 873 – RUST & STAIN REMOVER is available in 25/200/208 litre drums.

NAVACLEAN 873 RUST & STAIN REMOVER

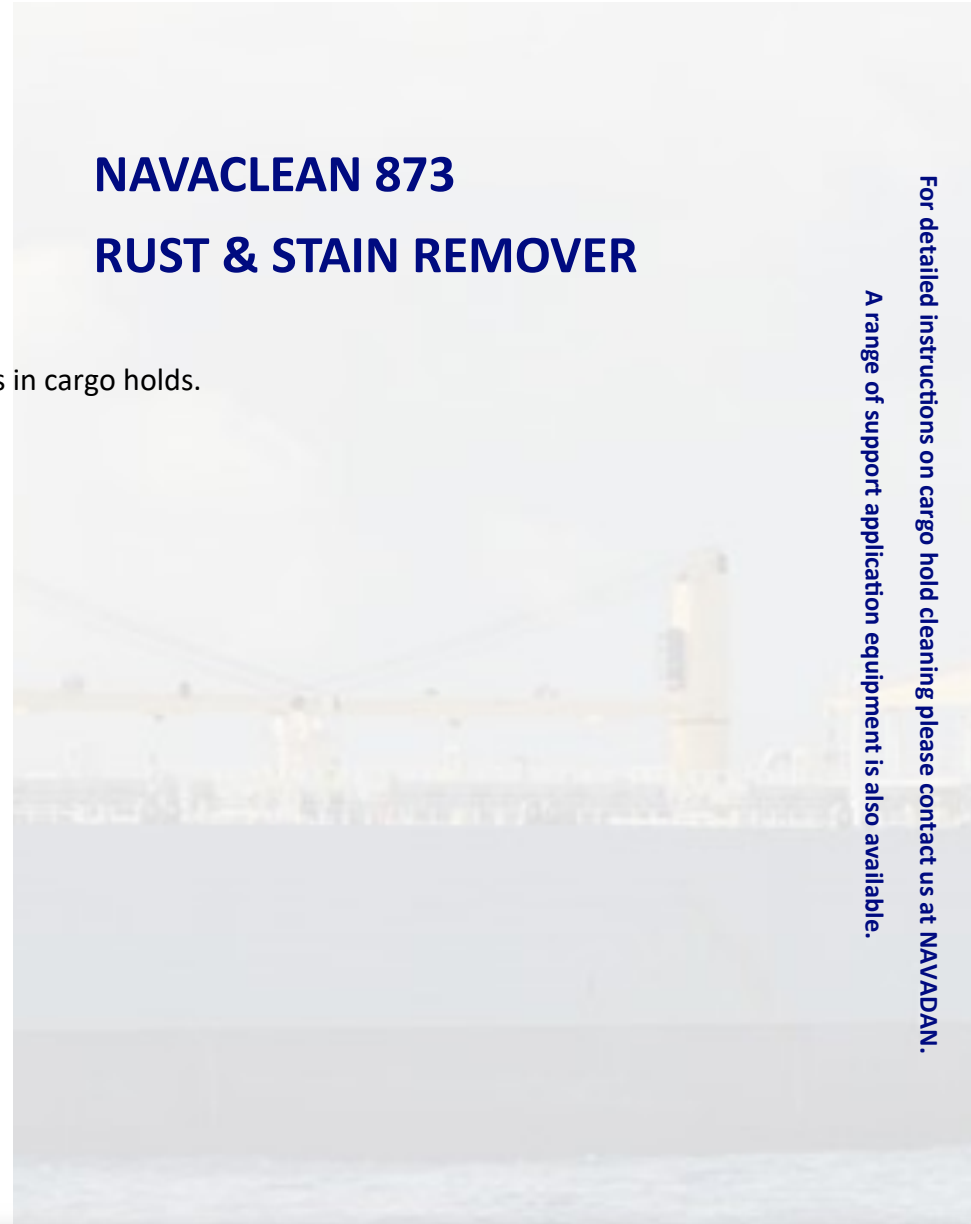

For detailed instructions on cargo hold cleaning please contact us at NAVADAN.
A range of support application equipment is also available.



Product Information: NAVACLEAN 873 RUST & STAIN REMOVER

NAVADAN APS · Skrugangen 3 · 2690 Karlslunde · Denmark
Tel. +45 4917 0357 · E-mail: navadan@navadan.com · www.navadan.com

DIRECTIONS FOR USE/APPLICATIONS & DOSAGE RATES

Always add NAVACLEAN 873 – RUST & STAIN REMOVER to water, never the reverse. NAVACLEAN 873 – RUST & STAIN REMOVER should always be used in a plastic bucket/container. Remove rust flakes, oil, grease and other dirt prior to using NAVACLEAN 873 – RUST & STAIN REMOVER.

Apply NAVACLEAN 873 – RUST & STAIN REMOVER to surfaces to be cleaned as follows:

- Use a solution of 50% to neat for severely corroded surfaces. Rinse off surface with water after 15-40 minutes.
- Use a solution of 20-50% for less corroded or soiled surfaces and tarnish on copper and brass. Rinse off surface with water after 15-40 minutes.
- Use a solution of 10-30% on aluminium. Rinse with water after a maximum of 5 minutes.
- Use a solution of 10-30% for removal of rust stains on painted surfaces, Rinse off with water 15-20 minutes after application.
- Apply a 50% solution for removal of light cement stains and lime, High pressure wash after 30-40 minutes, and for solidified cement use NAVACLEAN 977 – CEMENT REMOVER.

Caution: Always add NAVACLEAN 873 - RUST & STAIN REMOVER to water, never the reverse. Follow DIRECTIONS FOR USE/APPLICATIONS & DOSAGE RATES as above described. NAVACLEAN 873 - RUST & STAIN REMOVER should not be used on galvanised or tinned surfaces.

PRODUCT CHARACTERISTICS

Appearance:	Clear liquid
Specific gravity:	1.22 at 20°C
Flash Point:	None
pH-value (1% solution):	<2
Corrosive action:	
• Metals:	Slight action
• Rubber:	None

For Nature of special risks & safety regulations, please see our Material Safety Data Sheet



Product Information: NAVACLEAN 873 RUST & STAIN REMOVER

NAVADAN APS · Skrugangen 3 · 2690 Karlslunde · Denmark
Tel. +45 4917 0357 · E-mail: navadan@navadan.com · www.navadan.com